

SITE CLASSIFICATION

Client: Arbor Estates Pty Ltd 24 Jewell Court East Bendigo, Vic 3550

Date: 5 February 2016

Project: Lot 89 Tunstal Street, Canterbury Estate

1 INTRODUCTION

Arbor Estates Pty Ltd commissioned Geotechnical Testing Services to conduct a geotechnical investigation for the proposed residential development located at Lot 89 Tunstal Street, Canterbury Estate.

The investigation has been conducted for the purpose of assessing general subsurface conditions at the site and consequently assigning a Site Classification in accordance with AS2870 – 2011 "Residential Slabs and Footings".

2 INVESTIGATION

The investigation was conducted by a technician on the 28th of January, 2016 using a vehicle mounted drill-rig and drilling 2 boreholes to depths of 1.5 metres within the designated area. The subsequent soil profiles are presented in page 4 and the location of the boreholes are presented on page 5.

At the time of this investigation, the type of development proposed is unknown to GTS.

3 SITE CONDITIONS

The site has a natural slight fall to the west that has had controlled fill (supervised and tested by GTS) placed in a low spot through the centre to form the current surface levels. At the time of the investigation the surface of the site was dry with no grass cover. There are some small to medium trees present outside the rear boundary. There was no visual evidence of surface cracking or surface rocks. Groundwater seepage was not encountered over the investigated depths.

Full details of soil conditions are presented in the borehole logs.

Sandhurst Geotech Pty Ltd, Trading as Geotechnical Testing Services - Southern. ABN: 18 169 924 109 ACN: 169 924 109

Email: info@geotestsouthern.com.au; Ph: 03 5441 4881; Fax: 03 5441 5089; Mail Address: PO Box 13, STRATHDALE, Vic, 3550 Offices: • La Trobe University Applied Science 2 Building 7 Sharon Street, Flora Hill, VIC 3550; • Shed 3, 140 Ogilvie Avenue, Echuca , VIC 3654,

Geotechnical Investigations
Contract Drilling
Land Capability Assessments
Contamination Assessments
Compaction Control Testing
On-site
Wastewater Management
Site Classifications
Residential and Industrial
Soil, Concrete and Aggregate Testing Laboratories
Site Laboratory
Construction Material Testing Services
www.geotestsouthern.com.au



4 SITE CLASSIFICATION

After allowing due consideration to the site geology, soil conditions, the controlled fill (GTS report 15C 1048), drainage and known details of the proposed structure, the site has been classified as **Class M - D** (AS2870 – 2011).

Foundations designed in accordance with this classification are to be subject to the overriding conditions of Section 5 below.

5 DISCUSSION

Particular attention should be paid to the design of footings as required by AS2870 – 2011.

In addition to the normal founding requirements arising from the above classification, particular conditions at the site dictate that the founding medium and minimum depth below existing surface levels for all footings should be as follows:

• (Sandy) Silty CLAY, medium plasticity, pale brown/orange, very stiff At depths below 0.2 metres

An allowable bearing pressure of 100kPa is available for edge beams, strips and stump footings founded as above. All foundations should extend a minimum of 100mm into the above founding material.

It is noted that whilst controlled fill was not encountered in the boreholes, it may be encountered in the proposed building footprint and is a suitable founding medium with allowable bearing pressures as above.

The proposed dwelling should be located a minimum distance of 1 x the mature height of all trees. This distance can be increased by 50 % for groups or lines of trees. If this distance is impeded then the size and distance from the dwelling of the tree(s) needs to be taken into account when designing the foundation.

6 IMPORTANT NOTES ABOUT THIS REPORT

• The site classification presented in Section 4 assumes that the current natural drainage and infiltration conditions at the site will not be markedly affected by the proposed site development work. Care should therefore be taken to ensure that surface water is not permitted to collect



adjacent to the structure and that significant changes to seasonal soil moisture equilibria do not develop as a result of service trench construction or tree root action.

• Attention is drawn to Appendix B of AS 2870 and CSIRO document, BTF 18 – "Foundation Maintenance and Footing Performance: A Homeowner's Guide" as a guide to maintenance requirement for the proposed structure.

• This is not a comprehensive investigation nor is it economic or practical to determine every subsurface feature on the site. Although this investigation indicates that soil conditions are relatively uniform across the site, it is recommended that the base of all footing excavations be inspected to ensure that the founding medium meets that requirements referenced herein with respect to type and strength of founding materials. If further variations in descriptions in soil types, colour or depths are discovered during construction, this office should be notified immediately so that potential influence on the footings may be assessed.

• The soil colours provided in the borelogs attached may vary with soil moisture content and individual interpretation, therefore colour alone should not be used to identify these soils.

• Strength characteristics of soils often exhibit a large variation between wet and dry conditions. Soil characteristics of a soil profile are given on the soil conditions at the time of the investigation.

• In the event of significant earthworks being undertaken on the site after this investigation, this report may require an amendment if appropriate.

• If FILL is found during this investigation, it is an indication of what was found during the investigation and it may vary over the site. It may be in the best interest of the buyer / seller to undertake a more detailed investigation, in this instance.

Should you have any further queries concerning these results, please do not hesitate in contacting this office on 5441 4881

Yours faithfully

Hampton

Shane Hampton BE (Hons) Senior Geotechnical Engineer

<u>Enclosed</u> Borelogs (Page 4) Brief Site Map (Page 5)



Borehole Logs

Client:	Arbor Estates Pty Ltd	Borehole Log No.:	1 – 2
		Report Number:	16C 0051
		Date Drilled:	28/1/16
Project:	Lot 89 Tunstal Street, Canterbury Estate	Logged By:	ML
		Drilling Method	AS

Profile (mm):	* Structure: (see key)	Material Description:	Moisture Description:	Cohesion Density:	Plasticity:	Testing / Sampling:
0		BH1				
То	Fill	Sandy SILT	D	MD	-	-
200		Grey/yellow				
То	Soil	Sandy Silty CLAY	М	VST	Medium	-
500	Profile	Pale brown/orange				
То	SP/Rock	SILTSTONE/CLAY	М	VST	Medium	-
900		Brown/orange				
То	Rock	SILTSTONE/SANDSTONE	М	Soft Rock	-	-
1500		Extremely weathered, orange/yellow				
0		BH2				
То	Fill	Sandy SILT	D	S	-	-
200		Grey/yellow				
То	Soil	Silty CLAY	М	VST	Medium	-
600	Profile	Orange				
То	SP/Rock	SILTSTONE/CLAY	М	VST	Medium	-
1300		Orange/white				
То	Rock	SILTSTONE	М	Soft Rock	-	-
1500		Extremely weathered, orange/white				


Key:

Drilling Method: Moisture Condition		Cohesion:	Density:	Testing/Sampling:
AS - Auger Screwing D - Dry		VS - Very Soft	VL - Very Loose	PP – Pocket Penetrometer
HA - Hand Auger	M - Moist	S - Soft	L - Loose	V – Hand Vane Sheer
	W - Wet	F - Firm	MD - Medium Dense	DCP – Dynamic Cone Penetrometer
		ST - Stiff	D - Dense	SPT – Standard Penetration Test
		VST - Very Stiff	VD - Very Dense	US – Undisturbed Sampling
		H - Hard		DS – Disturbed Sampling
		VH – Very hard		* See notes on borelog location page



Borehole Locations

Client :	ARBOR ESTATES PTY LTD		Borehole No. :	1 - 2
			Report No. :	16C 0051
			Date Drilled :	28/1/16
Project:	LOT 89 TUNSTAL STREET		Operator:	ML
	CANTERBURY ESTATE		Drilling Method:	A.S
		J	Page No.:	5 of 5

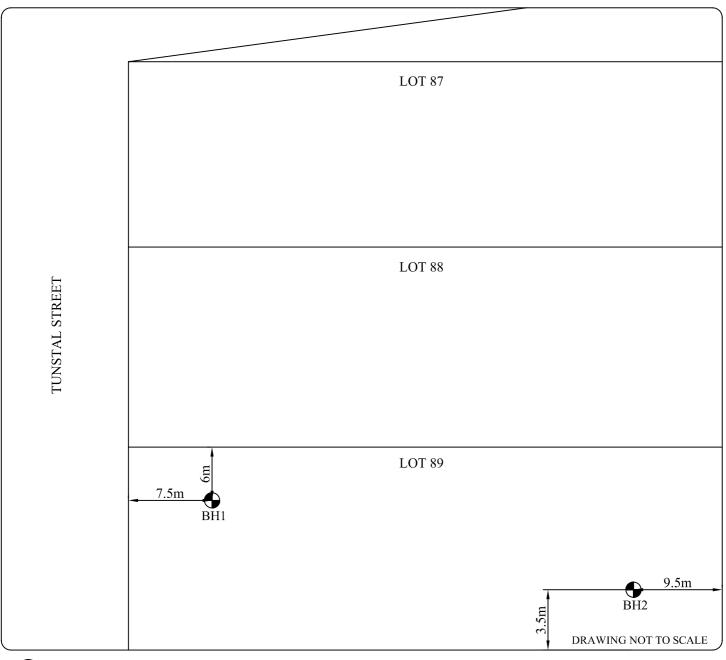

(T) = TREES